

DYNAMIC MODULUS TESTER LH-551, LH-552



The Dynamic Modulus Tester is a complete system that measures Sonic Velocity through materials. Physical properties derived from sonic velocity include modulus of elasticity, material anisotropy, molecular orientation in fibers and films as well as orientation of fibers in a web.

APPLICATIONS

Yarns such as Carbon, Glass, Polyester, Nylon, Tapes, Monofilament, or strips of most materials including Nonwovens

ADVANTAGES

- Small, table-top instrument for very quick and accurate measurement of sonic velocity through materials such as yarns, fibrous webs, films, tapes, paper and others
- Excellent tool for Production Control and R&D
- Non-destructive testing for most materials
- Same machine can be used to test both yarns and material strips by changing the sample mount

FEATURES

- Digital display of the transit time through material
- User friendly software program that calculates the sonic velocity automatically
- Fiber Scanner option for yarn and Planar Mount option for sheet material testing

OPERATION



The Dynamic Modulus Tester is a complete system that measures the velocity of the sonic pulses in materials such as yarns, films, tapes, non-wovens, and papers. The test materials is contacted by two transducers. The DMT software calculates the sonic velocity, which is used to measure the physical and chemical structure of materials.

OTHER USES

- Evaluation of experimental materials
- Production quality control
- Research, Assist in product development


DMT SOFTWARE SCREENS

The Dynamic Modulus Software will calculate a variety of Modulus results after the manual entry of the Distance and Velocity data is made at the Active Data screen. Below are screen shots of the software and the test report.

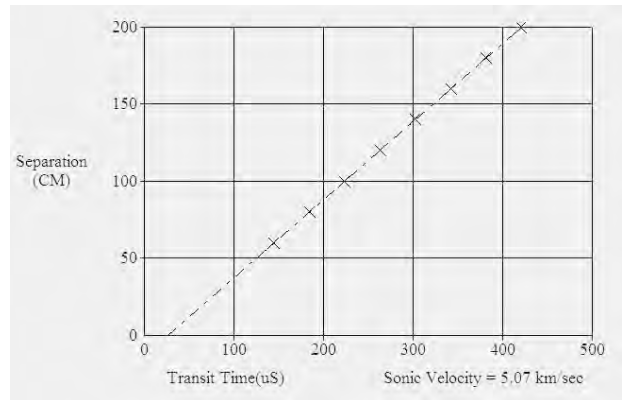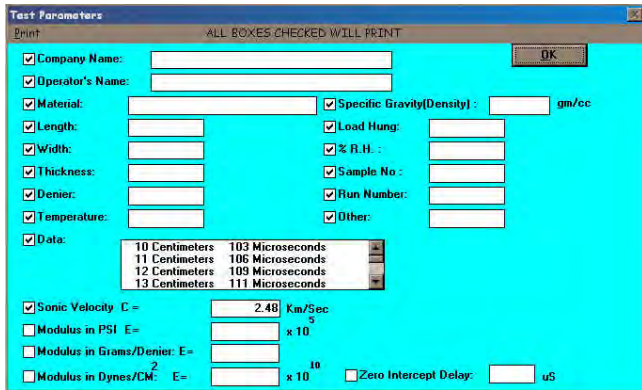


▲ Sonic Velocity Measurement for Steel Wire

SONIC VELOCITY MEASUREMENT FOR VARIOUS MATERIALS

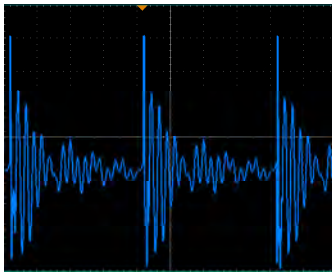

NYLON CORD
3.63km/sec



UHMPE
7.59km/sec



PARAARAMID
7.23km/sec

ORDERING INFORMATION

LH-551 DMT Fiber Scanner Option with V-shaped crystals for testing natural and synthetic yarns such as cotton, polyester, nylon, elastomeric, etc.

LH-552 DMT Planar Mount option with round tip crystals for testing film, tape, paper, thin strips of most materials. Insulated probes available for wet material testing.

INSTRUMENT SIZE (TEST BED)

Dimensions: 91 cm x 48 cm x 48 cm (36 in x 19 in x 19 in)

Weight: 17kg (37lbs.)

Contact us today for more information on the Dynamic Modulus Tester or any Lawson Hemphill product,

Please call us at 1-508-679-5364, or e-mail: information@lawsonhemphill.com

Please visit our website at
www.lawsonhemphill.com



Testing Machines Inc.
2 Fleetwood Court
Ronkonkoma, NY 11779
Tel: (631) 439-5400
Fax: (631) 439-5420
Info@testingmachines.com

Büchel BV
t/a Messmer Büchel
Fokkerstrat 24, 3905 KV
Veenendaal,
Netherlands
Tel: +33 (0)318 521500
Fax: +33 (0)318 5400358

Lako Tool and Manufacturing Inc.
7400 Ponderosa Road
Perrysburg, Ohio 43052
Tel: (419) 662-5256
Fax: (419) 662-8225

Lawson Hemphill
1658 G A R Highway
Swansea, MA 02777
Tel: (508) 679-5364
Fax: (508) 679-5396
Information@
lawsonhemphill.com

Adamel Lhomargy SARL
Z.A. de l'Habitat,
Bâtiment 6
Route d'Ozoir, 77680
Roissy en Brie, France
Tel: +33 (0) 1 6440291
Fax: +33 (0) 1 64409211

TMI Canada
P.O. Box 203
Pointe-Claire Dorval
QC, H9R-4N9 CAN
Tel: (514) 426-5855
Fax: (514) 426-1557



www.testingmachines.com

www.lakotool.com

www.lawsonhemphill.com